

## FEATURES

- 100-277V universal voltage
- Available in 22°, 35° and 57°
- Excellent thermal management for a long life
- IP65 rated for both outdoor and indoor use
- ½" NPT threaded arm with locking swivel
- UL/cUL approved, DLC premium qualified


## APPLICATIONS

- Indoor & outdoor lighting
- Landscape lighting
- Building lighting
- Flag pole lighting

## SPECIFICATIONS

Product Pictures			
Model No.	5BF12GL	5BF30L	5BF40SL
Power	12W	30W	40W
Voltage	100-277Vac, 50/60Hz	100-277Vac, 50/60Hz	100-277Vac, 50/60Hz
Lumen Range	1,450 -1,480 lm	3,600 - 3,870 lm	4,600 - 4,800 lm
Efficacy Range	123 - 125 lm/W	130 - 135 lm/W	120 - 126 lm/W
Color Temp.	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K
CRI	70	70	70
Beam Angle	22° / 35° / 57°	22° / 35° / 57°	22° / 35° / 57°
Dimensions	5.02" x 5.38" x 3.45"	6.91" x 6.25" x 4.66"	6.91" x 6.25" x 4.66"
Fixture Material	Die-Cast Aluminum	Die-Cast Aluminum	Die-Cast Aluminum
Fixture Color	Bronze(STD.)	Bronze(STD.)	Bronze(STD.)
Chips	Seoul	Seoul	Seoul
Driver Type	isolated LED driver	isolated LED driver	isolated LED driver
IP Rating	IP65	IP65	IP65
Operating Temp.	-30°C to +40°C	-30°C to +40°C	-30°C to +40°C
Safety Certification	UL/CUL, E352762	UL/CUL, E352762	UL/CUL, E352762
Energy Certification	DLC Premium	DLC Premium	DLC Premium
Test Reports	LM79, LM80, IES	LM79, LM80, IES	LM79, LM80, IES
Average Lifespan	50,000 hours	50,000 hours	50,000 hours
Warranty	5-year limited	5-year limited	5-year limited

## DIMENSIONS

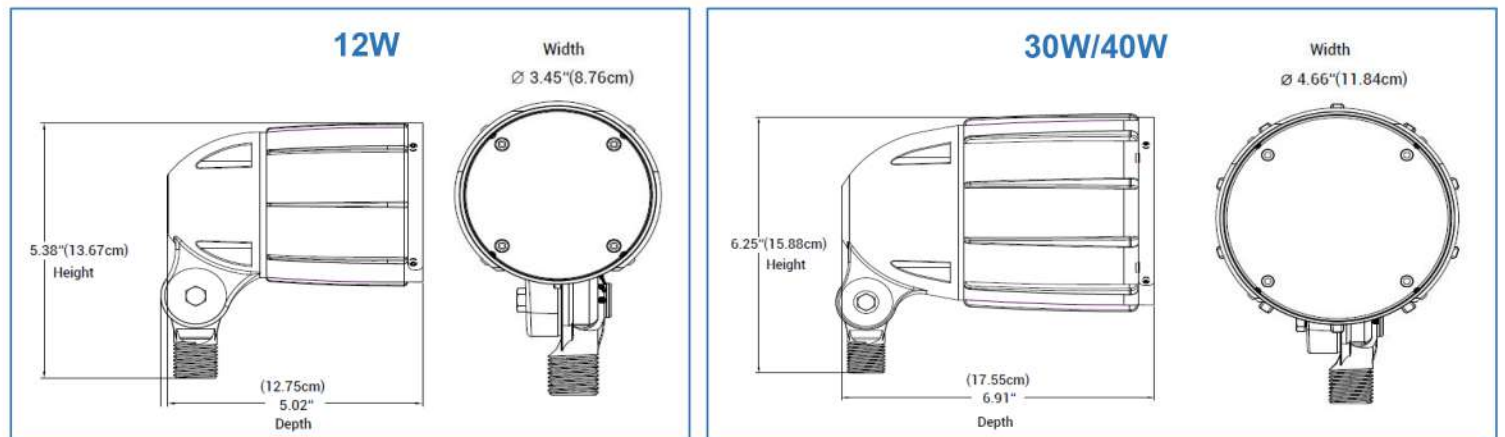

Due to our continued efforts to improve our products, product specifications are subject to change without notice.


## ORDERING INFORMATION

Order Example: 5BF40L30BDM

Gen.5 LED Bullet Flood Light, 40W, 100-277V, 3000K, Bronze Finish, 0-10V Dimmable, Medium 35°.

Series	Wattage	Voltage	CCT	Finish	Controls	Beam Angle
5BF= Gen.5 LED Bullet Flood Light	12G= 12W 30= 30W 40S= 40W	L= 100-277Vac	30= 3000K 40= 4000K 50= 5000K	B= Bronze BK= Black W= White	[Blank]= None D= 0-10V Dimmable	N= Narrow 22° M= Medium 35° W= Wide 57°

## INSTALLATIONS



Wall Mount



Ground Mount

Due to our continued efforts to improve our products, product specifications are subject to change without notice.