

FEATURES

- Unique modular design
- Medium beam angle 40° suitable for most general applications
- Excellent thermal management for a long life
- IP65 rated for both outdoor and indoor use
- ½" NPT threaded arm with locking swivel


APPLICATIONS

- Indoor & outdoor lighting
- Landscape lighting
- Building lighting
- Flag pole lighting

SPECIFICATIONS

Product Pictures			
Model No.	7BF06	7BF12	7BF30
Power	6W	12W	30W
Voltage	Single Voltage, 120Vac or 230Vac	Single Voltage, 120Vac or 230Vac	Single Voltage, 120Vac or 230Vac
Lumen Range	690 LM	1,380 LM	3,450 LM
Efficacy Range	115 lm/W	115 lm/W	115 lm/W
Color Temp.	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K
CRI	70	70	70
Beam Angle	40°	40°	40°
Dimensions	inch: Φ4.406", 5.906" H x 2.323" D mm: Φ112, 150 H x 59 D	inch: Φ4.406", 5.906" H x 2.323" D mm: Φ112, 150 H x 59 D	inch: Φ5.823", 7.323" H x 2.323" D mm: Φ147.3, 186 H x 59 D
Fixture Material	Die-Cast Aluminum	Die-Cast Aluminum	Die-Cast Aluminum
Fixture Color	Bronze(STD.)	Bronze(STD.)	Bronze(STD.)
Chips	2835 LEDs	2835 LEDs	2835 LEDs
Dimming Type	PWM Dimming Only	PWM Dimming Only	PWM Dimming Only
IP Rating	IP65	IP65	IP65
Operating Temp.	-35°C to +45°C	-35°C to +45°C	-35°C to +45°C
Safety Certification	ETL/cETL Listed	ETL/cETL Listed	ETL/cETL Listed
Energy Certification	DLC Pending	DLC Pending	DLC Pending
Test Reports	LM79, LM80, IES Pending	LM79, LM80, IES Pending	LM79, LM80, IES Pending
Average Lifespan	50,000 hours	50,000 hours	50,000 hours
Warranty	5-year limited	5-year limited	5-year limited

DIMENSIONS

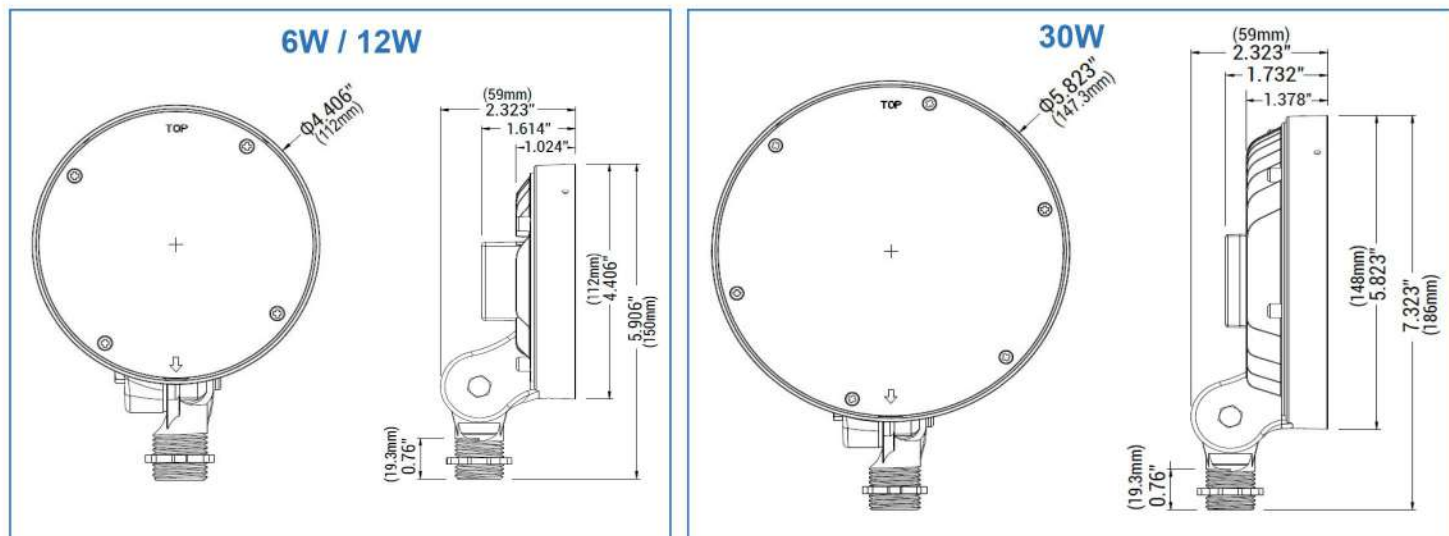

Due to our continued efforts to improve our products, product specifications are subject to change without notice.

ORDERING INFORMATION

Order Example: 7BF12L30BDM

Gen.7 LED Bullet Flood Light, 12W, 120V, 3000K, Bronze Finish, PWM Dimming, Medium 40°.

7BF	12	L	30	B	D	M
-----	----	---	----	---	---	---

Series	Wattage	Voltage	CCT	Finish	Controls	Beam Angle
7BF= Gen.7 LED Bullet Flood Light	6= 6W 12= 12W 30= 30W	L= 120V or 230V <i>*Please must specify the voltage when ordering.</i>	30= 3000K 40= 4000K 50= 5000K	B= Bronze(Std.) BK= Black W= White	D= PWM Dimming [Blank]= None	M= Medium 40°

ACCESSORIES



****All accessories sold separately.***