


MWP09 | CCT MINI WALL PACK

Project: _____ Type: _____

Name: _____ Date: _____

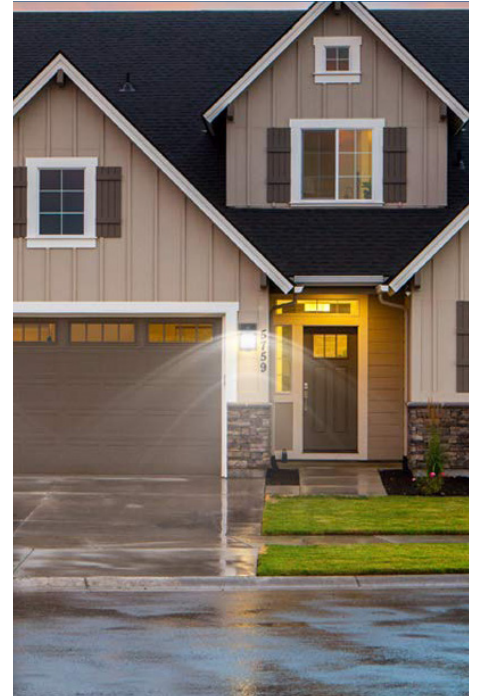

Size	5" W x 8.2" H x 2.8" D	Lumens	2,014lm - 4,050lm
Watts	20W, 30W	CCT Tunable	3000K-4000K-5000K
Voltage	120-277V	IP Rating	IP65
Dimming	0-10V	Materials	Aluminum, PC
Beam Angle	100°	Finish	Bronze
CRI	>80	Lens	Clear
PF	≥0.9	Lifespan	50,000 Hours

OVERVIEW

Tunable: CCT
Applications: IP65
Efficacy: 128-140lm/W
Dimming: 0-10V
LED Type: Lumileds 2835
Lens Type: Clear
Driver: HB-FL19F025 (20W & 30W)
Operating Temp: -40F° to 113F°
Operating Humidity: 10% - 90% RH
Lifespan: 50,000 Hours
Warranty: 5 Years


FEATURES

- Offers cool white light with a 100° beam spread
- Photocell Light Sensor automatically activates the lights when dark




PHOTOMETRICS:

20W

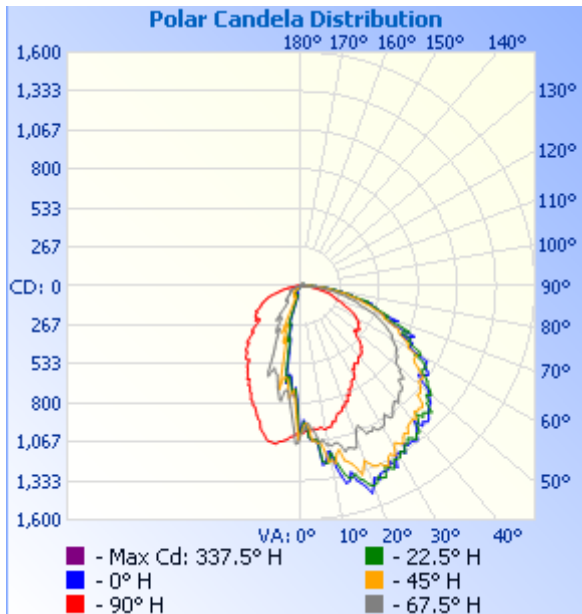

30W

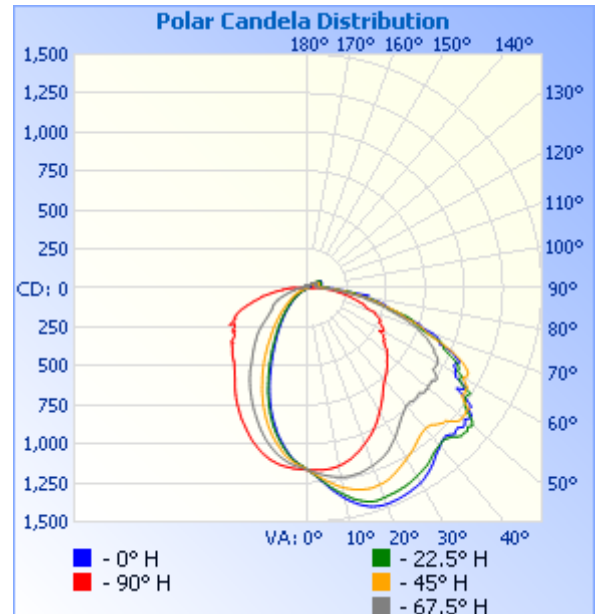

Illuminance at a Distance

	Center Beam fc	Beam Width	
4.3ft	54.5 fc	6.0 ft	8.9 ft
8.7ft	13.3 fc	12.0 ft	17.9 ft
13.0ft	5.97 fc	18.0 ft	26.8 ft
17.3ft	3.37 fc	24.0 ft	35.7 ft
21.7ft	2.14 fc	30.0 ft	44.7 ft
26.0ft	1.49 fc	36.0 ft	53.6 ft

■ Vert. Spread: 69.4°
■ Horiz. Spread: 91.7°

Illuminance at a Distance

	Center Beam fc	Beam Width	
4.3ft	63.1 fc	8.8 ft	14.5 ft
8.7ft	15.4 fc	17.9 ft	29.4 ft
13.0ft	6.90 fc	26.7 ft	44.0 ft
17.3ft	3.90 fc	35.6 ft	58.5 ft
21.7ft	2.48 fc	44.6 ft	73.4 ft
26.0ft	1.73 fc	53.4 ft	87.9 ft

■ Vert. Spread: 91.6°
■ Horiz. Spread: 118.8°

DIMENSIONS:

