



3875 PROFILE

Direct & Indirect Series

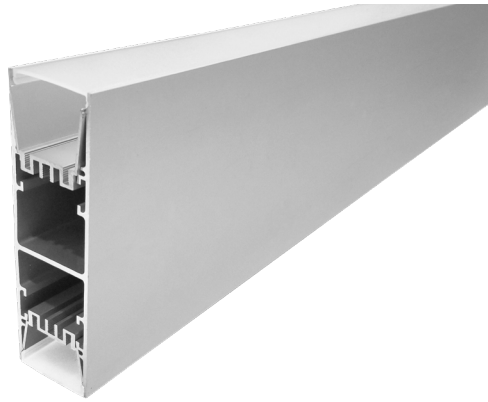

DIMENSIONS

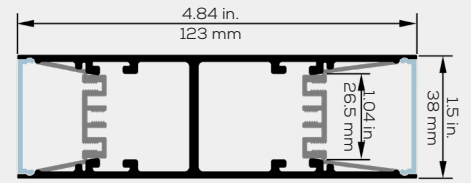

BALANCED DIRECT & INDIRECT LIGHT










A profile with indirect lighting in mind, this linear fixture is typically suspended for a unique blend of illumination and accent lighting.

FEATURES

- Compatible with LED engines up to 26mm wide.
- The opaque lens provides uniform light without hot spots.
- Custom length by sections of 8 to 196 inches.
- Constructed from high-grade 6063-T5 aluminum alloy for heat dissipation.
- This optimal heat dissipation maximizes the lifespan of the LEDs.
- The PMMA lens has high transmittance and resistance to discoloration.
- Designed to meet North-American woodworking standards.



















3875 PROFILE ORDERING SHEET

PROFILE	D-LENS	I-LENS	LENGTH	DIRECT	INDIRECT	USAGE	DRIVER	MOUNT	PARTS
 ▶ 3875 - Silver	 O - Opaque	 O - Opaque	 Custom length in segments of 10 to 196 inches.	1.250lm 7.7W/ft ▶ 27 - 2700K ▶ 30 - 3000K ▶ 40 - 4000K ▶ 50 - 5000K ▶ 60 - 6000K	1.250lm 7.7W/ft ▶ 27 - 2700K ▶ 30 - 3000K ▶ 40 - 4000K ▶ 50 - 5000K ▶ 60 - 6000K	▶ IP20 - Dry ▶ IP68 - Wet	▶ 23W AC100-277V ▶ 44W AC100-277V 3-in-1 dimming 0-10V, PWM, Rx	▶ D - 6.5' Suspension	▶ Z - 180° Conn. ▶ I - 90° Conn. J - X Module K - T Module L - L Module
 RAL № - Color Custom powder coating	 ▶ F - Frosted	 ▶ F - Frosted		CCT - Tunable RGB - RGB	CCT - Tunable RGB - RGB				
	 C - Clear	 C - Clear							
PROFILE	D-LENS	I-LENS	LENGTH	D-LIGHT	I-LIGHT	USAGE	DRIVER	MOUNT	PARTS

Mark "N/A" to signify options you do not need.

ITEM CODES

- | | | | |
|---|--|---|---|
|  12501 - Linear Extrusion |  12501-H - Frosted Lens |  12501-K - T Module |  12501-D - 6.5' Suspension |
|  12501-F - Direct Gear Tray |  12651 - 23W Driver |  12501-L - L Module |  12500-G - Hanging Ring |
|  12501-G - Indirect Gear Tray |  12650 - 44W Driver |  12501-E - 180° Connectors |  12501-B - Inner Clip Kit |
|  12501-A - End Caps |  12501-J - X Module |  12501-I - 90° Connectors |  12501-C - Safety Cable |

Draw your dream fixture below and let us make it a reality.

