



# 5075 PROFILE

Direct & Indirect Series

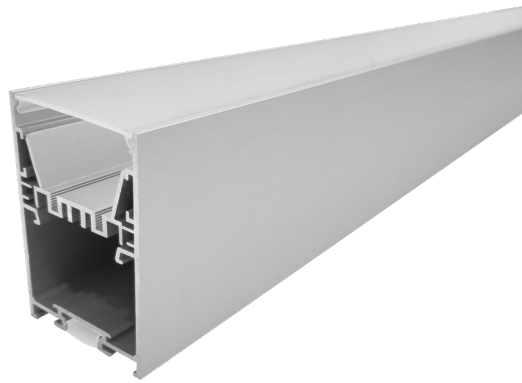

## DIMENSIONS

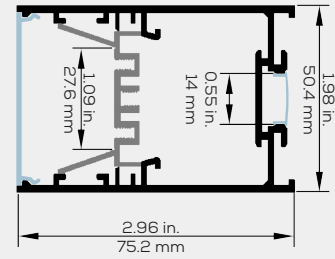

## TASK LIGHTING WITH AN AMBIENT TOUCH














You can suspend this fixture to take advantage of the discreet accent light, or surface mount it directly to your ceiling.

### FEATURES

- Compatible with LED engines up to 26mm wide for front, 12mm wide for back.
- The opaque lens provides uniform light without hot spots.
- Custom length by sections of 8 to 196 inches.
- Constructed from high-grade 6063-T5 aluminum alloy for heat dissipation.
- This optimal heat dissipation maximizes the lifespan of the LEDs.
- The PMMA lens has high transmittance and resistance to discoloration.
- Designed to meet North-American woodworking standards.





















## 5075 PROFILE ORDERING SHEET

PROFILE	D-LENS	I-LENS	LENGTH	DIRECT	INDIRECT	USAGE	DRIVER	MOUNT	PARTS
 ▶ 5075 - Silver	 O - Opaque	 O - Opaque	 Custom length in segments of 10 to 196 inches.	1.250lm 7.7W/ft ▶ 27 - 2700K ▶ 30 - 3000K ▶ 40 - 4000K ▶ 50 - 5000K ▶ 60 - 6000K	655lm 3.8W/ft ▶ 27 - 2700K ▶ 30 - 3000K ▶ 40 - 4000K ▶ 50 - 5000K ▶ 60 - 6000K	 ▶ IP20 - Dry ▶ IP68 - Wet	 ▶ 23W AC100-277V ▶ 44W AC100-277V 3-in-1 dimming 0-10V, PWM, Rx	 ▶ D - Surface Mount ▶ E - 6.5' Suspension	 ▶ Z - 180° Conn. ▶ I - 90° Conn. J - X Module K - T Module L - L Module
 RAL Ne - Color Custom powder coating	 ▶ F - Frosted	 ▶ F - Frosted		*Lowest approximation based on 110lm/W ▶ CCT - Tunable ▶ RGB - RGB	*Lowest approximation based on 110lm/W ▶ CCT - Tunable ▶ RGB - RGB				
	 C - Clear	 C - Clear							
PROFILE	D-LENS	I-LENS	LENGTH	D-LIGHT	I-LIGHT	USAGE	DRIVER	MOUNT	PARTS

Mark "N/A" to signify options you do not need.

### ITEM CODES

- |                                                                                                             |                                                                                                                |                                                                                                              |                                                                                                              |                                                                                                                 |
|-------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|
|  12500 - Linear Extrusion |  12651 - 23W Driver         |  12500-L - T Module       |  12500-D - Surface Mount  |  12500-N - 3M Tape         |
|  12500-H - Gear Tray      |  12650 - 44W Driver         |  12500-M - L Module       |  12500-B - Inner Clip Kit |  12500-E - 6.5' Suspension |
|  12500-A - End Caps       |  12500-F - 180° Connectors  |  12500-K - X Module       |  12500-C - Safety Cable   |                                                                                                                 |
|  12500-I - Frosted Direct |  12500-O - Frosted Indirect |  12500-J - 90° Connectors |  12500-G - Hanging Ring   |                                                                                                                 |

---

---

---

---

Draw your dream fixture below and let us make it a reality.

