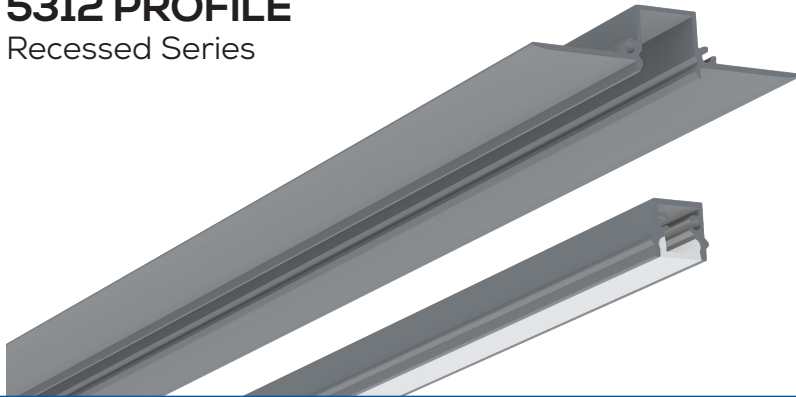
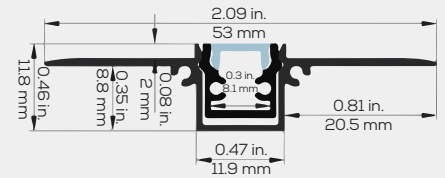


5312 PROFILE

Recessed Series



DIMENSIONS



A DOUBLE PROFILE FOR EASY INSTALLATION












Once the main extrusion is installed into your surface, the separate interior channel can be placed inside after the dust has settled.

FEATURES

- Compatible with LED engines up to 6mm wide.
- The opaque lens provides uniform light without hot spots.
- Custom length by sections of 2 to 196 inches.
- Constructed from high-grade 6063-T5 aluminum alloy for heat dissipation.
- This optimal heat dissipation maximizes the lifespan of the LEDs.
- The PC lens is lightweight with high transmittance and impact resistance.
- Designed to meet North-American woodworking standards.










5312 PROFILE ORDERING SHEET

PROFILE	LENS	LENGTH	LIGHT	USAGE	DRIVER
 ▶ 5312 - Silver	 O - Opaque Lens	 Custom length in segments of 2 to 196 inches.	175lm 2.2W/ft  ▶ 27 - 2700K ▶ 30 - 3000K ▶ 40 - 4000K ▶ 50 - 5000K ▶ 60 - 6000K CCT - 2700-6500K RGB - RGB	 ▶ IP20 - Dry Areas ▶ IP68 - Wet Areas	 ▶ 30W AC120-277V  ▶ 60W AC120-277V  ▶ 96W AC120-277V 5-in-1 dimming TRIAC, 0-10V, 1-10V, PWM, Potentiometer
 ▶ RAL № - Any Color Custom powder coating	 ▶ F - Frosted Lens  C - Clear Lens				
PROFILE	LENS	LENGTH	LIGHT	USAGE	DRIVER

Mark "N/A" to signify options you do not need.

ITEM CODES

-  **12507** - Linear Extrusion
-  **12507-B** - Gear Tray
-  **12507-A** - End Caps
-  **12507-C** - Frosted Lens
-  **40662-A** - 30W Driver
-  **40662-B** - 60W Driver
-  **40662-C** - 96W Driver

Draw your dream fixture below and let us make it a reality.

