



# 5319 PROFILE

Recessed Series

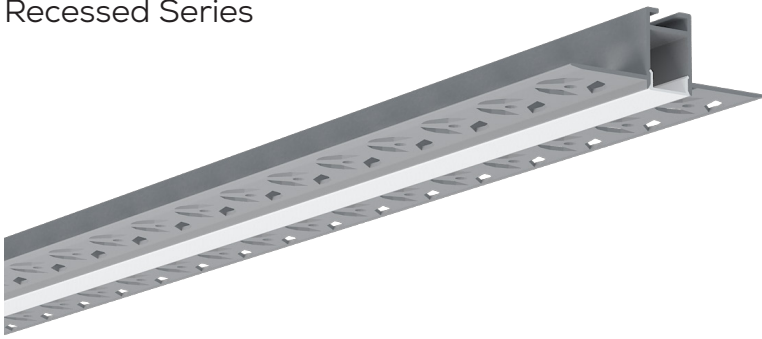

## DIMENSIONS

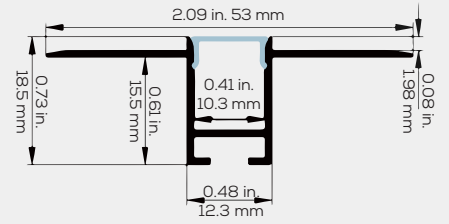


## THE STANDARD RECESSED LIGHT SYSTEM













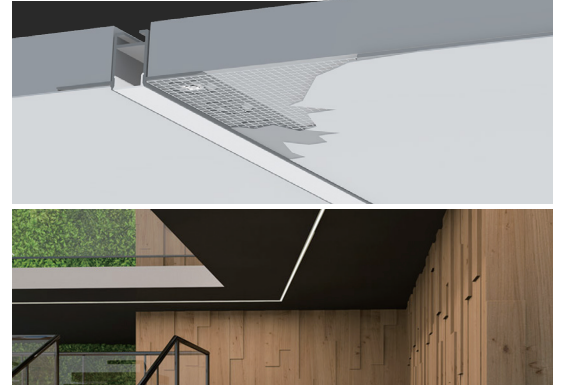





A profile that sets the standard when it comes to an embedded linear wall or ceiling light for any commercial or residential space.

### FEATURES

- Compatible with LED engines up to 10mm wide.
- The opaque lens provides uniform light without hot spots.
- Custom length by sections of 2 to 196 inches.
- Constructed from high-grade 6063-T5 aluminum alloy for heat dissipation.
- This optimal heat dissipation maximizes the lifespan of the LEDs.
- The PC lens is lightweight with high transmittance and impact resistance.
- Designed to meet North-American woodworking standards.










## 5319 PROFILE ORDERING SHEET

PROFILE	LENS	LENGTH	LIGHT	USAGE	DRIVER
 ▶ <b>5319</b> - Silver	 O - Opaque Lens	 Custom length in segments of 2 to 196 inches.	760lm 5.5W/ft  ▶ <b>27</b> - 2700K ▶ <b>30</b> - 3000K ▶ <b>40</b> - 4000K ▶ <b>50</b> - 5000K ▶ <b>60</b> - 6000K 365lm 4.3W/ft ▶ <b>CCT</b> - 2700-6500K  ▶ <b>RGB</b> - RGB	 ▶ <b>IP20</b> - Dry Areas ▶ <b>IP68</b> - Wet Areas	 ▶ <b>30W</b> AC120-277V  ▶ <b>60W</b> AC120-277V  ▶ <b>96W</b> AC120-277V 5-in-1 dimming TRIAC, 0-10V, 1-10V, PWM, Potentiometer
 ▶ <b>RAL №</b> - Any Color Custom powder coating	 ▶ <b>F</b> - Frosted Lens				
	 C - Clear Lens				
 PROFILE	 LENS	 LENGTH	 LIGHT	 USAGE	 DRIVER

Mark "N/A" to signify options you do not need.

### ITEM CODES

- |  |   |
|--|---|
|  <b>12506</b> - Linear Extrusion |  <b>40662-A</b> - 30W Driver |
|  <b>12506-A</b> - End Caps       |  <b>40662-B</b> - 60W Driver |
|  <b>12506-B</b> - Frosted Lens   |  <b>40662-C</b> - 96W Driver |
|  <b>40662-F</b> - CCT Remote     |   |

---

---

---

---

Draw your dream fixture below and let us make it a reality.

