



# 1001 PROFILE

## Suspended Series

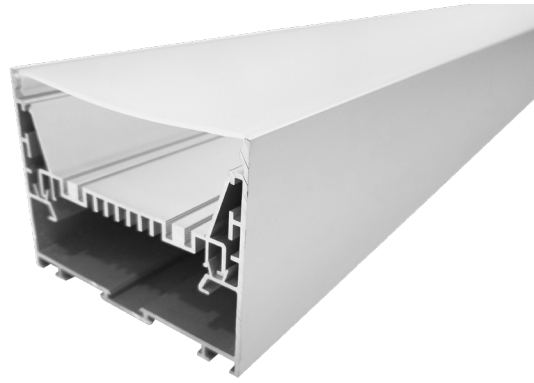

### DIMENSIONS



## A MODERN & ROBUST LUMINAIRE SYSTEM
















This large and highly customizable linear system can be suspended or surface mounted, plus has a clean finish without visible screws.

### FEATURES

- Compatible with LED engines up to 68mm wide.
- The opaque lens provides uniform light without hot spots.
- Custom length by sections of 8 to 196 inches.
- Constructed from high-grade 6063-T5 aluminum alloy for heat dissipation.
- This optimal heat dissipation maximizes the lifespan of the LEDs.
- The PMMA lens has high transmittance and resistance to discoloration.
- Designed to meet North-American woodworking standards.











## 1001 PROFILE ORDERING SHEET

PROFILE	LENS	LENGTH	LIGHT	USAGE	DRIVER	MOUNT	PARTS
 <p>▶ <b>1001</b> - Silver</p>	 <p><b>O</b> - Opaque Lens</p>	 <p>Custom length in segments of 12 to 196 inches.</p>	<p>2,195lm 12.8W/ft</p> <p>▶ <b>27</b> - 2700K</p> <p>▶ <b>30</b> - 3000K</p> <p>▶ <b>40</b> - 4000K</p> <p>▶ <b>50</b> - 5000K</p> <p>▶ <b>60</b> - 6000K</p> <p>CCT - 2700-6500K</p> <p>RGB - RGB</p>	<p>▶ <b>IP20</b> - Dry Areas</p> <p>▶ <b>IP68</b> - Wet Areas</p>	 <p>▶ <b>65W</b> AC100-277V</p> <p>3-in-1 dimming 0-10V, PWM, Rx</p>	<p>▶ <b>D</b> - Surface Mount</p> <p>▶ <b>E</b> - 6.5' Suspension</p>	<p>▶ <b>Z</b> - 180° Connector</p> <p>▶ <b>I</b> - 90° Connector</p> <p><b>J</b> - X Module</p> <p><b>K</b> - T Module</p> <p><b>L</b> - L Module</p>
 <p><b>RAL Nc</b> - Any Color Custom powder coating</p>	 <p>▶ <b>F</b> - Frosted Lens</p>						
	 <p><b>C</b> - Clear Lens</p>						
 <p>PROFILE</p>	 <p>LENS</p>	 <p>LENGTH</p>	 <p>LIGHT</p>	 <p>USAGE</p>	 <p>DRIVER</p>	 <p>MOUNT</p>	 <p>PARTS</p>

Mark "N/A" to signify options you do not need.

### ITEM CODES

- |  |  |  |   |
|--|--|--|---|
|  <b>12502</b> - Linear Extrusion |  <b>12652</b> - 65W Driver        |  <b>12502-K</b> - T Module        |  <b>12502-D</b> - Surface Mount  |
|  <b>12502-G</b> - Gear Tray      |  <b>12502-F</b> - 180° Connectors |  <b>12502-L</b> - L Module        |  <b>12502-B</b> - Inner Clip Kit |
|  <b>12502-A</b> - End Caps       |  <b>12502-I</b> - 90° Connectors  |  <b>12502-E</b> - 6.5' Suspension |  <b>12502-C</b> - Safety Cable   |
|  <b>12502-H</b> - Frosted Lens   |  <b>12502-J</b> - X Module        |  <b>12500-G</b> - Hanging Ring    |   |

---

---

---

---

Draw your dream fixture below and let us make it a reality.

