

WPR01 | ROTATABLE LED WALL PACK

Project: _____ Type: _____

Name: _____ Date: _____



Size	See Dimensions	Lumens	11176: 3,250-3,500lm 11174: 5,200-5,600lm 11175: 10,400-11,200lm
Watts	25W, 40W, 80W	CCT	5700K
Voltage	120-277V	IP Rating	IP65
Dimming	0-10V	Materials	Aluminum
Beam Angle	60°	Finish	Bronze
CRI	>70	Lens	Clear
PF	≥0.9	Lifespan	50,000 Hours

OVERVIEW

Tunable: 5700K

Applications: IP65

Efficacy: 130-140lm/W

Dimming: 0-10V

LED Type: SMD 3030

Driver: See Last Page

Operating Temp: -22° to 113F°

Operating Humidity: 10%-90% RH

Lifespan: 50,000 Hours

Warranty: 5 Years

FEATURES

- Available in 4 different wattages: 25W, 40W, 80W
- Protected from the elements with an IP65 rating, making it suitable for rainy environments

SARIN ROTATABLE LED MINI WALL PACKS adopts the latest technology, replacing traditional bulbs with energy efficient LEDs. These are widely used in the lighting of homes, hotels, offices, hallways, garages, streets, landscapes and other commercial spaces and includes an emergency backup.

These fixtures are suitable for a variety of applications and will provide significant energy savings. Choose from four energy-saving wattages—25W, 40W, and 80W—and a bright 5700K color temperature.




WPRO1 | ROTATABLE LED WALL PACK

Project: _____ Type: _____

Name: _____ Date: _____

PHOTOMETRICS:

25W

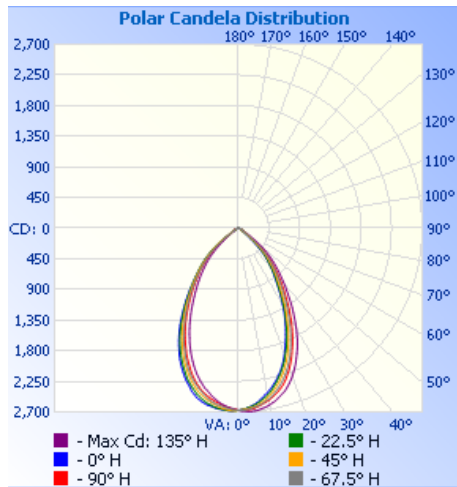


Illuminance at a Distance

	Center Beam fc	Beam Width	
2.5ft	428 fc	3.2 ft	3.2 ft
5.0ft	107 fc	6.3 ft	6.5 ft
7.5ft	47.5 fc	9.5 ft	9.7 ft
10.0ft	26.7 fc	12.7 ft	13.0 ft
12.5ft	17.1 fc	15.8 ft	16.2 ft
15.0ft	11.9 fc	19.0 ft	19.4 ft

■ Vert. Spread: 64.7°
■ Horiz. Spread: 65.9°

40W

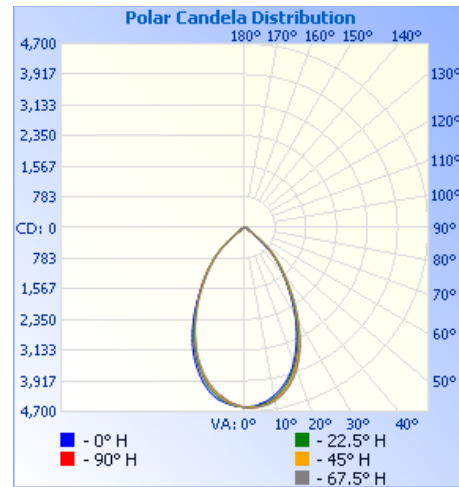


Illuminance at a Distance

	Center Beam fc	Beam Width	
2.5ft	734 fc	3.2 ft	3.2 ft
5.0ft	183 fc	6.3 ft	6.4 ft
7.5ft	81.5 fc	9.5 ft	9.6 ft
10.0ft	45.8 fc	12.7 ft	12.8 ft
12.5ft	29.3 fc	15.9 ft	16.0 ft
15.0ft	20.4 fc	19.0 ft	19.2 ft

■ Vert. Spread: 64.8°
■ Horiz. Spread: 65.3°

80W

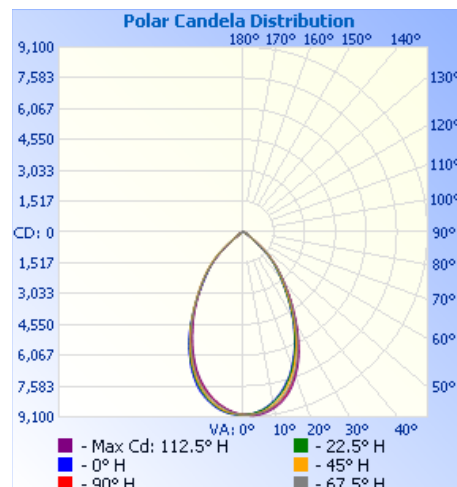

Illuminance at a Distance

	Center Beam fc	Beam Width	
2.5ft	1,438 fc	3.1 ft	3.2 ft
5.0ft	359 fc	6.3 ft	6.4 ft
7.5ft	160 fc	9.4 ft	9.6 ft
10.0ft	89.9 fc	12.5 ft	12.8 ft
12.5ft	57.5 fc	15.7 ft	16.0 ft
15.0ft	39.9 fc	18.8 ft	19.2 ft

■ Vert. Spread: 64.2°
■ Horiz. Spread: 65.1°



WPR01 | ROTATABLE LED WALL PACK

Project: _____ Type: _____



Name: _____ Date: _____

DIMENSIONS:

25W, 40W

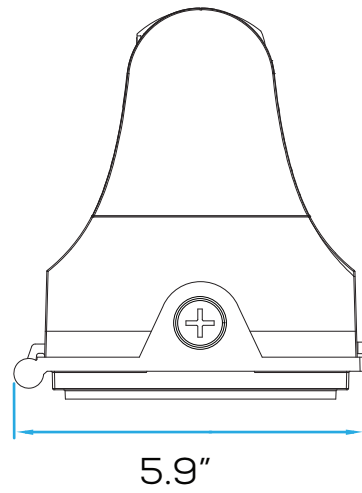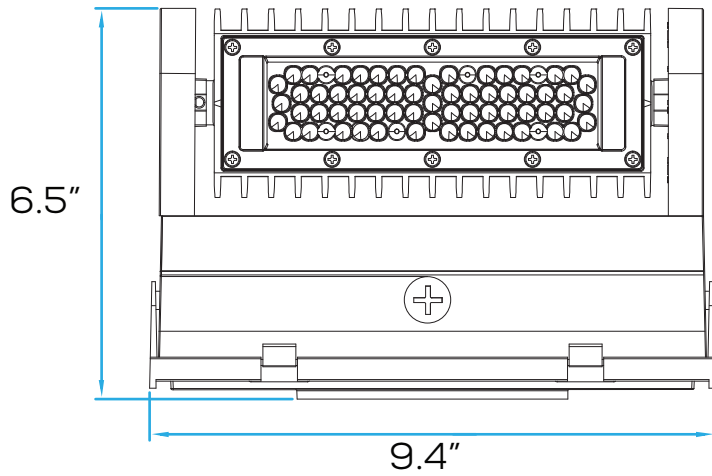

80W

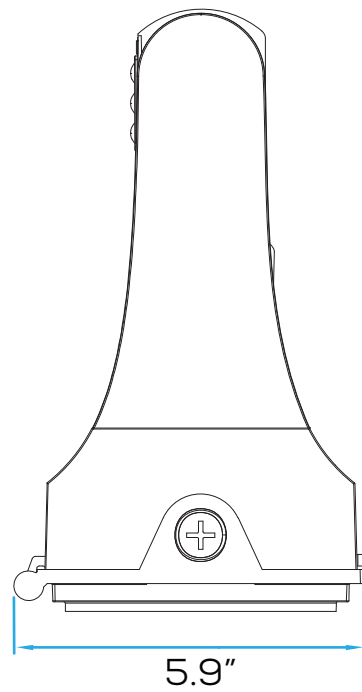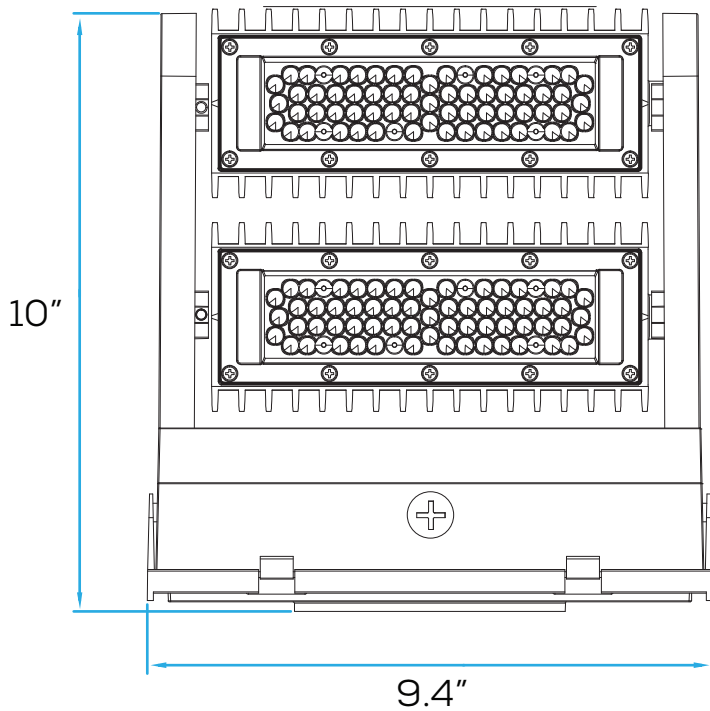

WPR01 | ROTATABLE LED WALL PACK

Project: _____ Type: _____

Name: _____ Date: _____

ORDER FORM:

(*) Special Order/Not Commonly Stocked

Custom Model Assembly

	Fixture	CCT	Watts	Beam Angle	Voltage
<input checked="" type="checkbox"/> WPR01	<input checked="" type="checkbox"/> 5700K	<input type="checkbox"/> 25W	<input checked="" type="checkbox"/> 60°	<input checked="" type="checkbox"/> 120-277V	
		<input type="checkbox"/> 40W			
		<input type="checkbox"/> 60W*			
		<input type="checkbox"/> 80W			

SES-WPR01-5700-40
Example Model Number

SES – WPR01 – 5700K – 60° – 120-277V

Quantity

Fixture

CCT

Watts

Beam Angle

Voltage

Common Stock Models:

Item #	Model #	Driver
11174	SES-WPR01-5700-40	HB-LPG040-52
11175	SES-WPR01-5700-80	WP-HHA-075U0441700
11176	SES-WPR01-5700-25	HB-LPG030-52